


ASSEMBLY INSTRUCTIONS




ROTO
INDUSTRIES, INC.

solutions for the solid waste and recycling industry

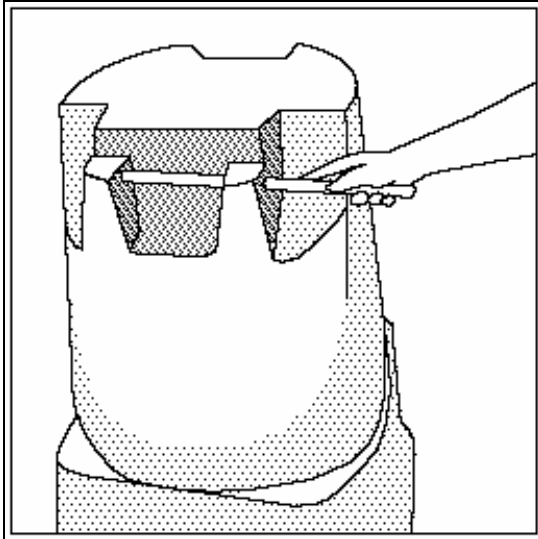

1) Invert containers and slide axle through sleeves provided.

2) Slide wheels over axle ends as shown. Using a hammer, drive pal nuts on axle ends on both sides.

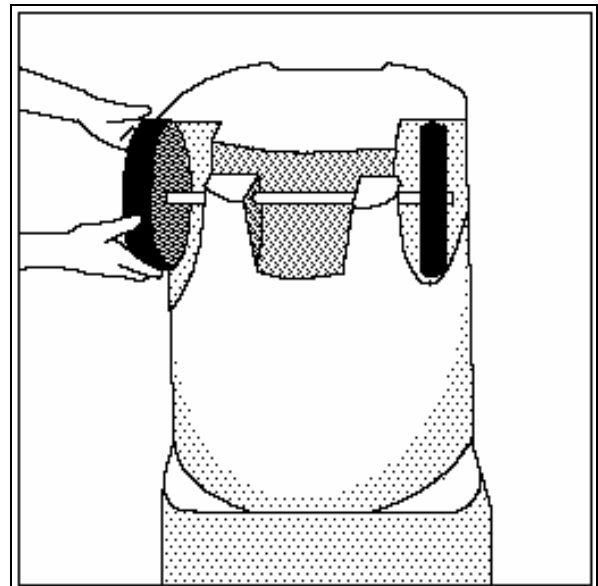


ASSEMBLY INSTRUCTIONS




ROTO
INDUSTRIES, INC.

solutions for the solid waste and recycling industry

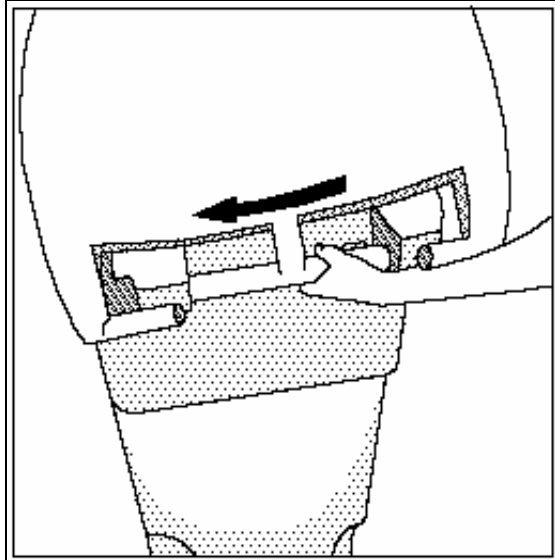


3) Place lid on top of container. Insert left center hinge of lid inside the inner left container sleeve.

4) Insert the left outer lid hinge inside the left outer container sleeve. Slide lid to the right inserting the right center lid hinge inside the inner right container sleeve.

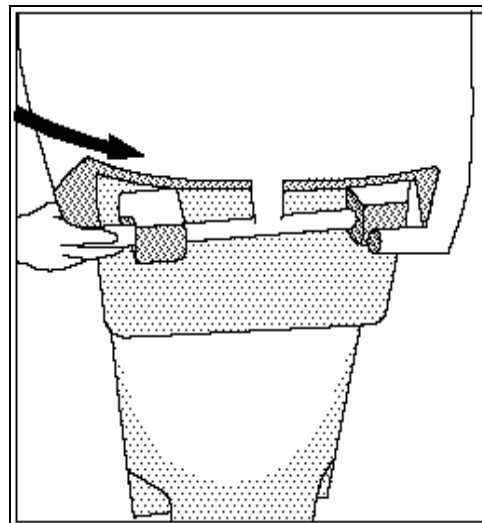

5) Pull to the far right (exert pressure)

ASSEMBLY INSTRUCTIONS

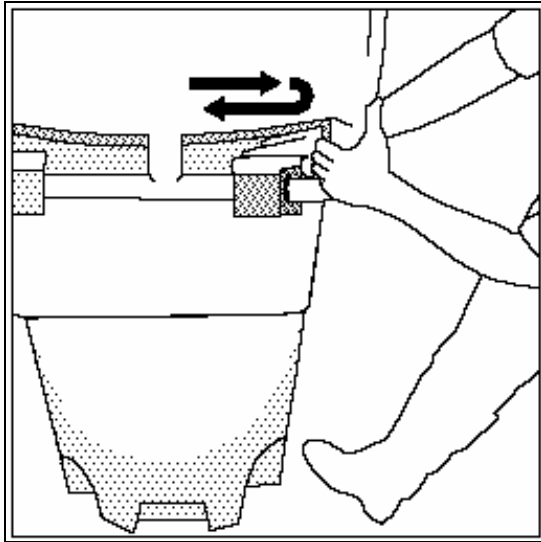

Parts Of 35,60, 90 Gallon Carts	
PART DESCRIPTION	# REQUIRED
Container Base	1
Container Lid	1
8" or 10" x 1.75" Wheels	2
5/8 Inch Axle	1
5/8 Inch Pal Nut or Cotter Pin & Washer	2
Catch Bar (Universal Only)	1

ROTO Industries Inc., 1251 N. Jefferson St., Anaheim, California , 92807, United States of America, 714-630-0272 , Fax 714-630-6726, 800-634-7686, www.rotoid.com